


SELF-CONTAINED STAND

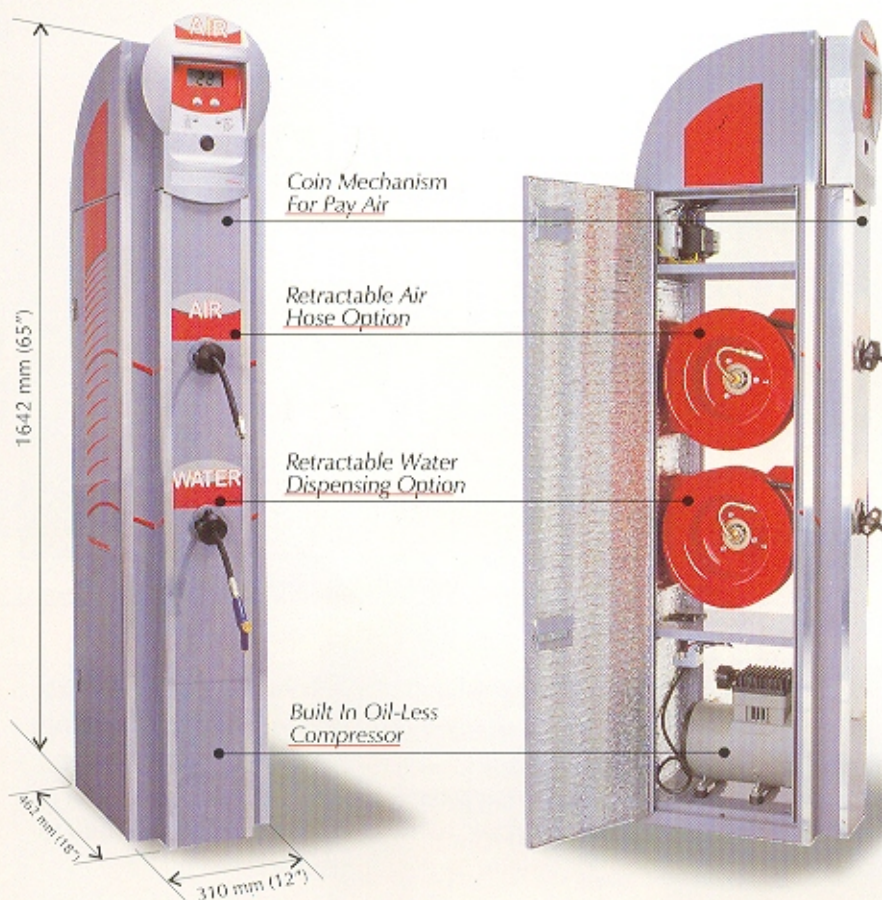

Self contained air tower

- Sturdy steel cabinet.
- Dual door for easy entry.
- 1.5 HP oil less compressor
- Designed to fit your needs. Hose reels, water tap, and coin mechanism optional.
- Compressor automatically starts when hose chuck is connected to valve stem, in "free air" units.
- Corporate colors and logos

Configurations Modularity

Free Air: the compressor starts "on demand" by the tire gauge. Air and water retractable hoses are optional.

Pay Air: the compressor works for a programmed length of time when a coin is inserted.

Packing: weight and size

	Weight (Kg)	Box (cm)	Volume (m3)
Pneutronic	5	45 x 35 x 19	0,03
Hose set (10 mts) 1/4" 200 psi	1	45 x 35 x 6	0,01
Stand	15	30 x 30 x 154	0,14
Hood	5	48 x 31 x 55	0,08
Self-contained Air Tower	90	55 x 35 x 170	0,33

Electronic Gauge

TECHNICAL FILE	Car Version	Truck Version
Working Range	5 - 70 psi	10 - 127 psi
Incoming Pressure	80 - 175 psi	130 - 175 psi
Weight	5 Kgs	5 Kgs
Default Pressure	26 psi	100 psi
Power Consumption	10 W	
Operating Temperature	-10 C ° a + 50 C °	
Power Supply	110, 230 Vac +/- 10% - 50 / 60 Hz	
Degree of Protection	IP-54	



Excel Tire Gauge
1441 Park Avenue
Cranston, RI 02920 USA
Tel #401 275 9700
Fax #401 275 0740

**Excel Produtos
Eletrônicos Ltda.**
Rua Antônio Cavazan 267
Cep 02534-001
São Paulo SP Brasil
Fone/Fax 55 11 3858 7724

home page www.excelbr.com.br
email excelbr@excelbr.com.br

presented by

